
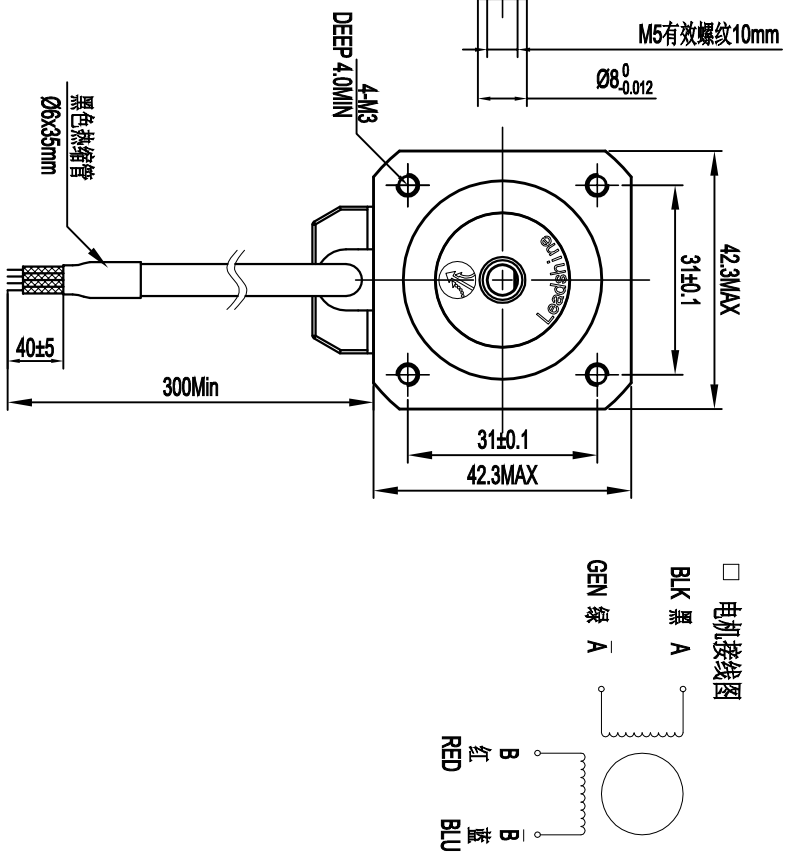


DIMENSIONS Unit=mm

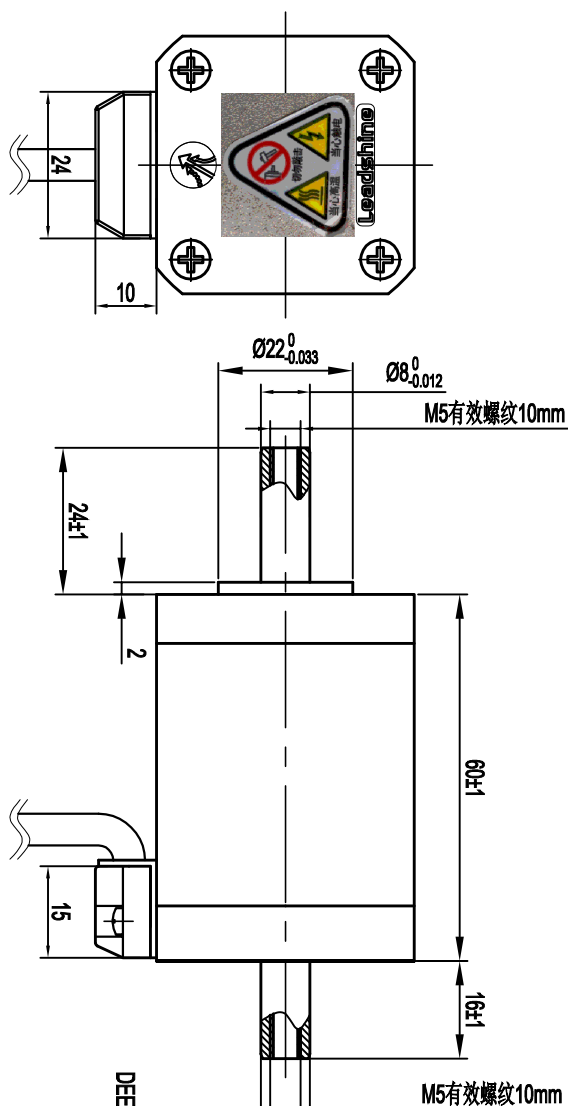

版本	日期	变更文件号	变更内容	设计
Version	Date	ECN NO.	Revisions	By
V1.0	20.04.16		初版	王洪林

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 450g)
Axial play	Max.0.08mm(load 900g)

Current/phase	2.5 A
Voltage	2.5 V
DC Resistance/phase $\pm 10\%$	1 Ω
Inductance/phase $\pm 20\%$	2.4 mH
Holding torque	80 N • CM
Inertia	0.11 kg • cm ²
Weight	0.5 kg

设计	日期	材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
Designed	2020.04.16	Material	
审核	2020.04.16	第一角画法 First Angle projection	
Checked	2020.04.16	 	
批准	2020.04.16	原图/原底 Original Scale 比例 Scale 标识 State Mark 图号 DWG. NO.	
Approved	2020.04.16	A/01 共 1 套 第 1 套 Sheet 1 of 1	混合式步进电机 L22CM08-SZ-ZK
图号 DWG. NO.	LS-MT-01-07A	未 1 套 第 1 套 Sheet 1 of 1	LS-42CM08-SZ-ZK